

FEATURE:

- ◆ Fast switching speeds(down to 20 ns maximum)
- ◆ Optimized for lowest phase deviation over band
- ◆ RMS phase error $\leq 3^\circ$ typical
- ◆ Low insertion loss
- ◆ Power handing up to 30dbm
- ◆ Hermetic sealing available



APPLICATION:

- ◆ Test equipment
- ◆ Radar&EW array system
- ◆ Communication system

SPECIFICATIONS:

ITEMS	Parameters
Fre. Range (GHz)	6~18GHz
IL (dB)	10dB
VSWR(Type)	1.8
Switching Speed (ns)	100ns
Phase Accuracy (°)	4°
Amplitude Balance (dB.Max)	0.5dB
Phase Shift(°)	360°
Step Site (°)	5.625°
Control(Bits)	6Bits
Power Handing(dBm)	27dBm




HENGWEI MICROWAVE

HWDPH60180-6

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10000		30000	feet
Shock / Vibration(MIL-STD-810F)		Airborne		

OUTLINE DRAWING(mm):

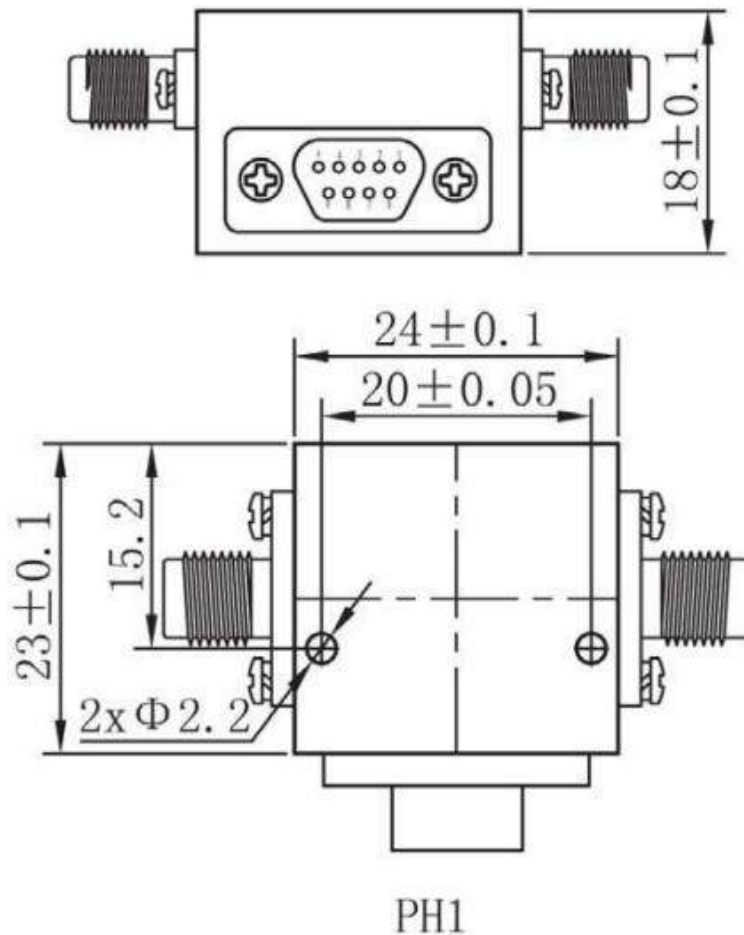

Connector: RF Input、Output (SMA-K 50 Ω)

Control Port: J30J-9

J30J-9 Pin Definition:

PIN No.	Property
1~7	Phase Control Port
8	NC
9	GND

Control: TTL Level

“0” : 0V; “1” : +5V


Phase Shifter	J30J-9 Pin No.						
	1	2	3	4	5	6	7
0° (Reference)	0	0	0	0	0	0	1
5°	1	0	0	0	0	0	1
11°	0	1	0	0	0	0	1
22°	0	0	1	0	0	0	1
45°	0	0	0	1	0	0	1
90°	0	0	0	0	1	0	1
180°	0	0	0	0	0	1	1
355°	1	1	1	1	1	1	1




HENGWEI MICROWAVE

HWDPH60180-6


HWDPH60180-6 TEST CURVE AS FOLLOWS:

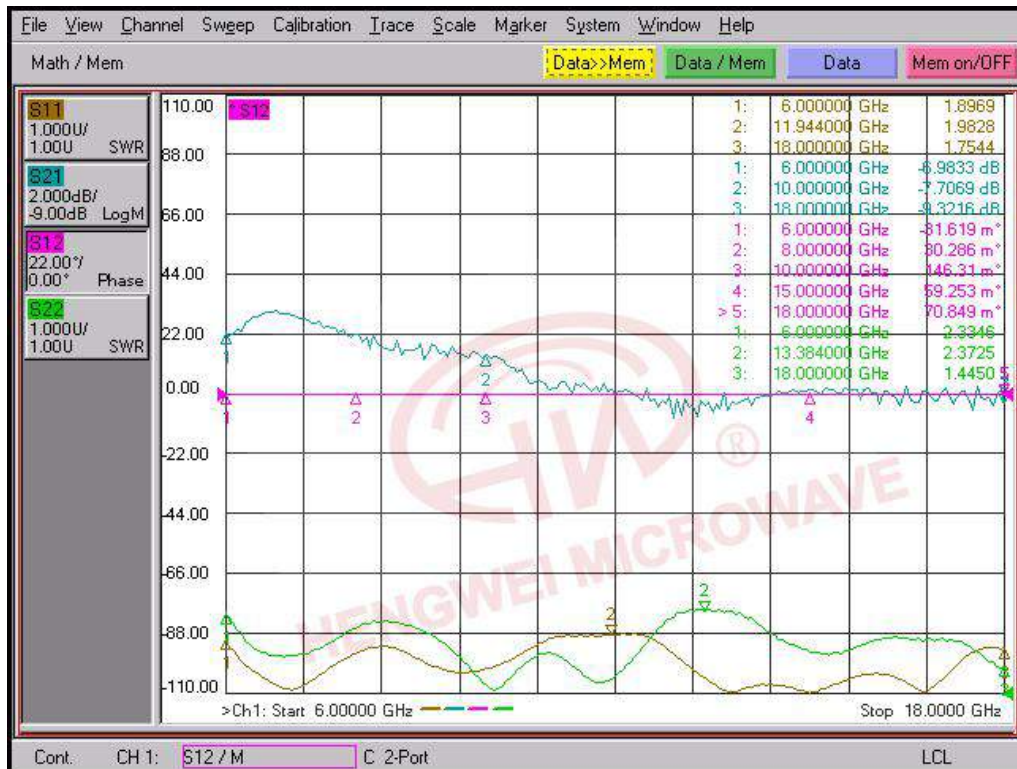


PIC1: 0° Test Curve

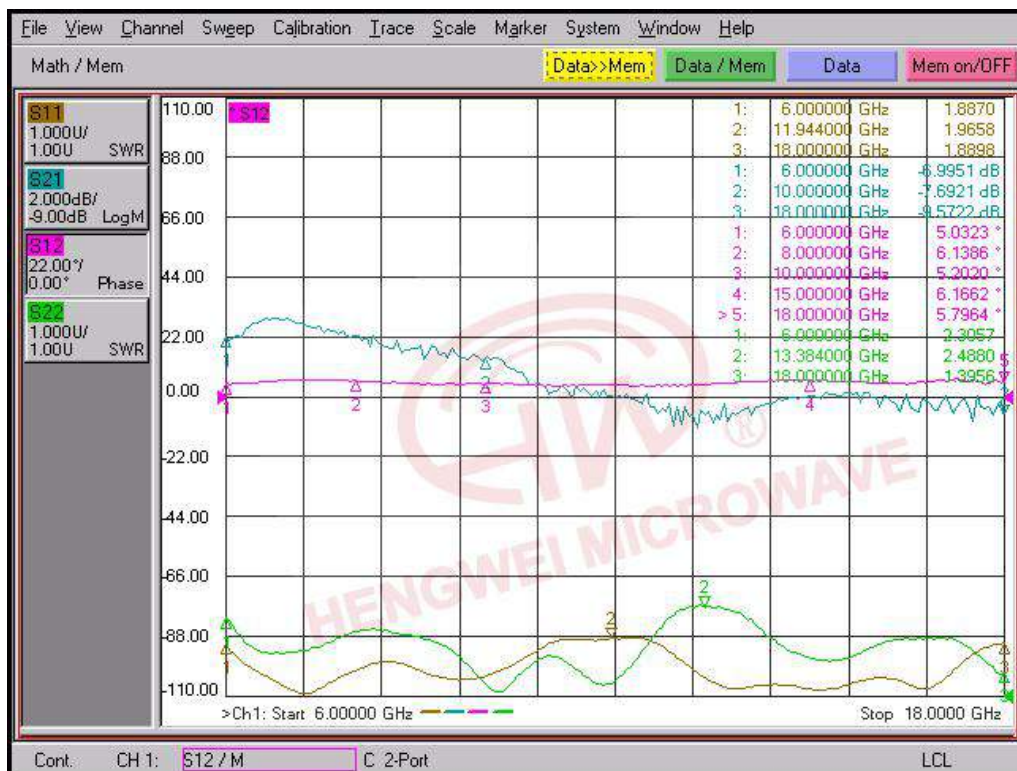


PIC2: 5° Test Curve

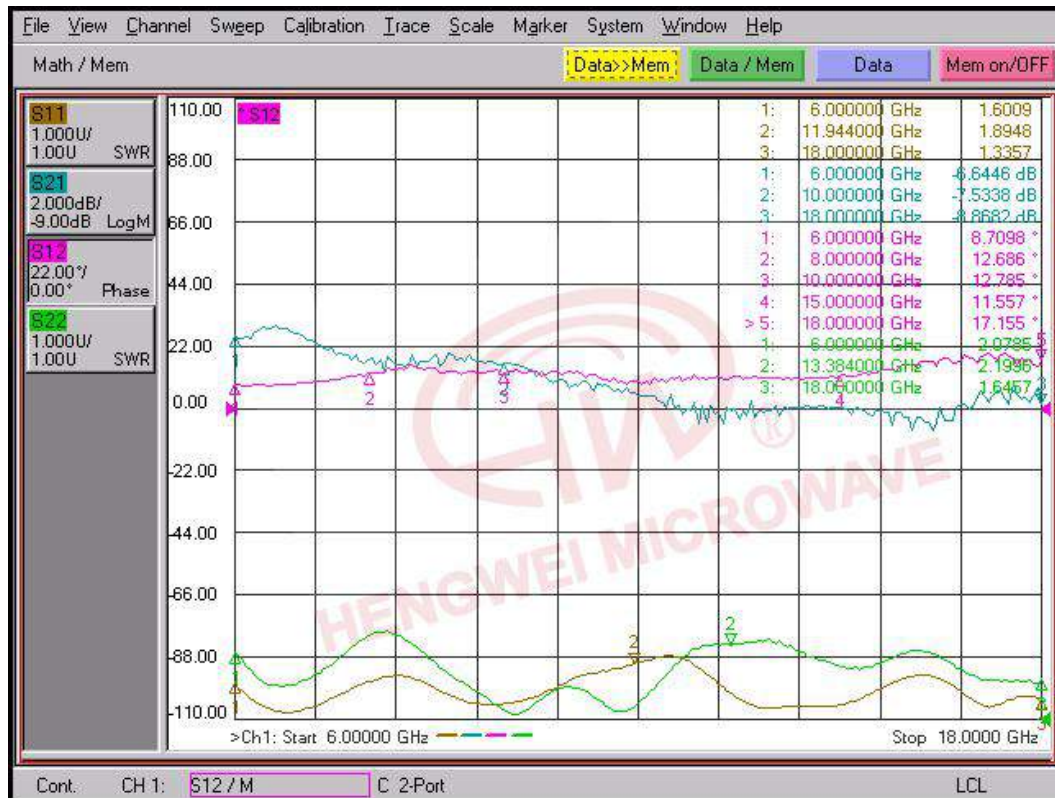


PIC3: 11° Test Curve

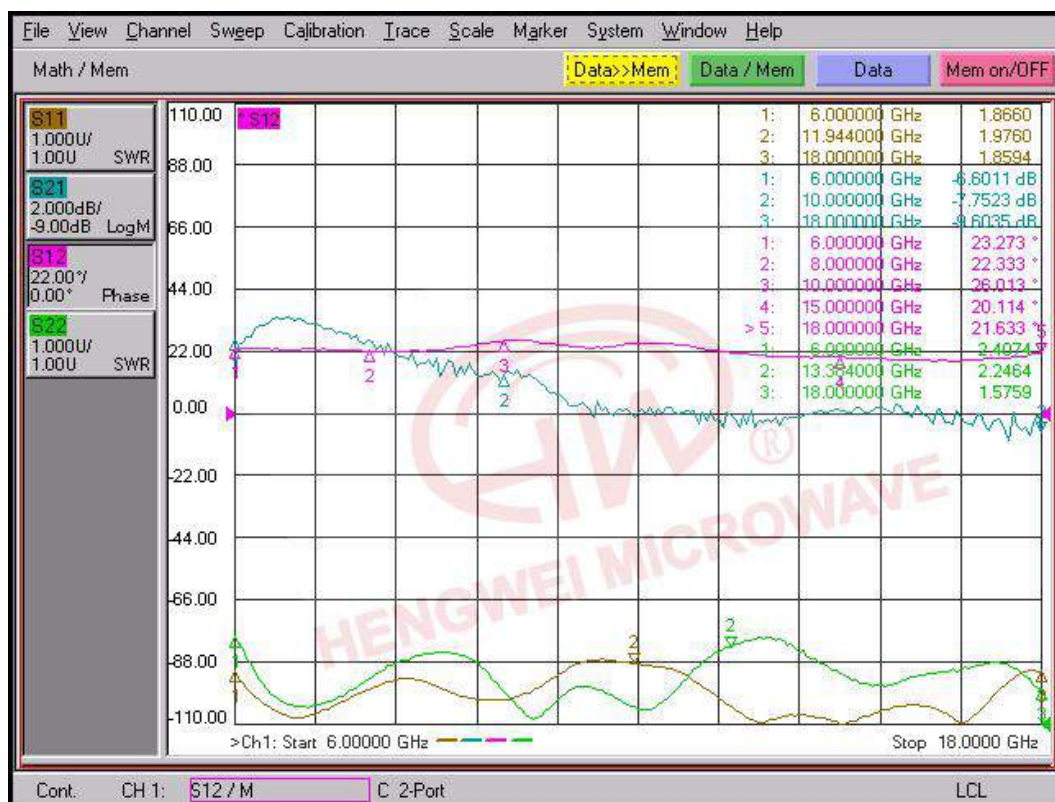

PIC4: 22° Test Curve

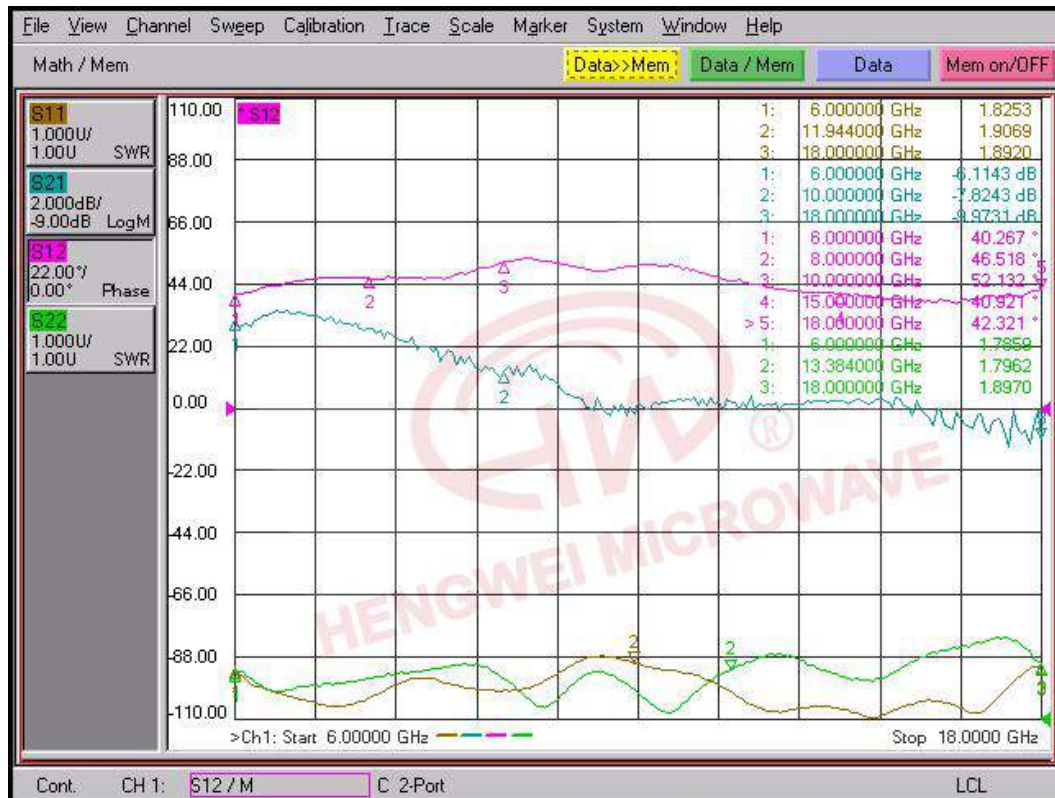

PIC5: 45° Test Curve

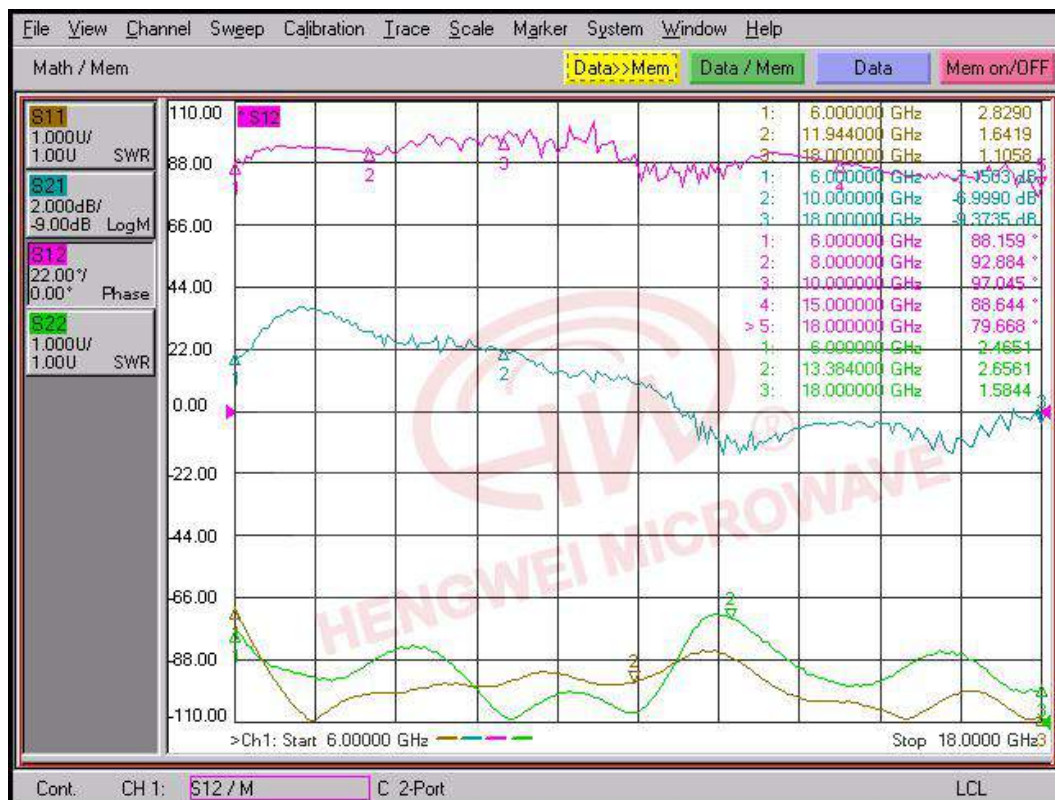


PIC6: 90° Test Curve




HENGWEI MICROWAVE

HWDPH60180-6

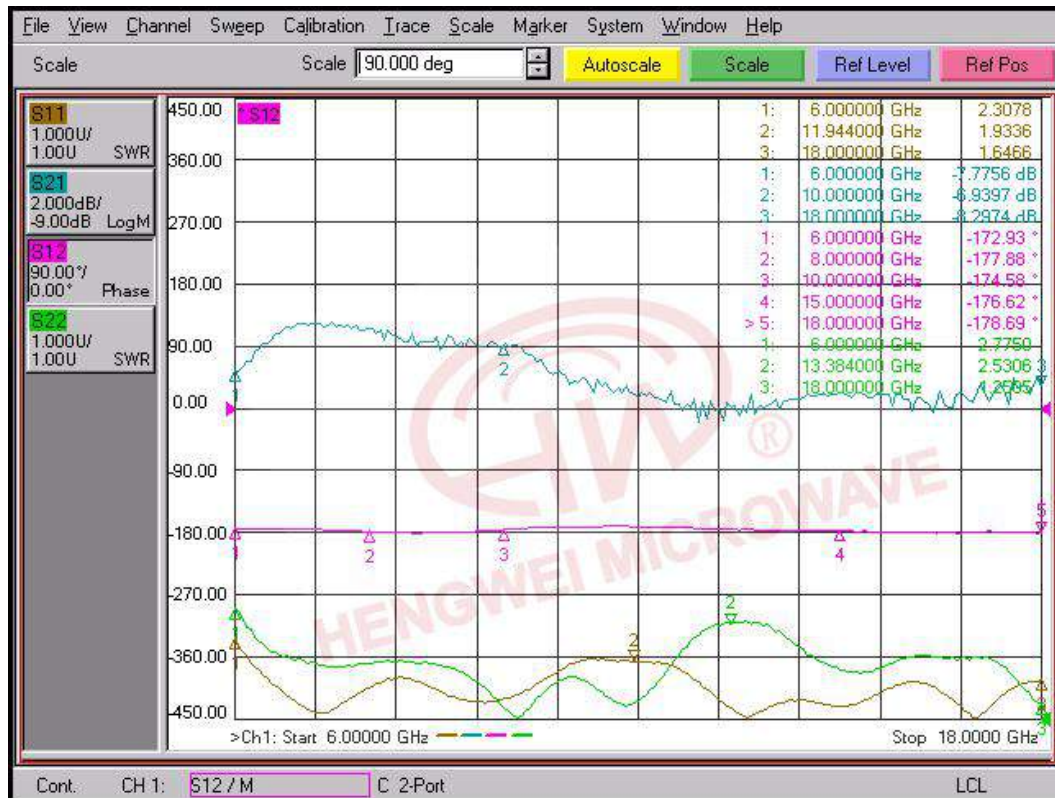

PIC7: 180° Test Curve

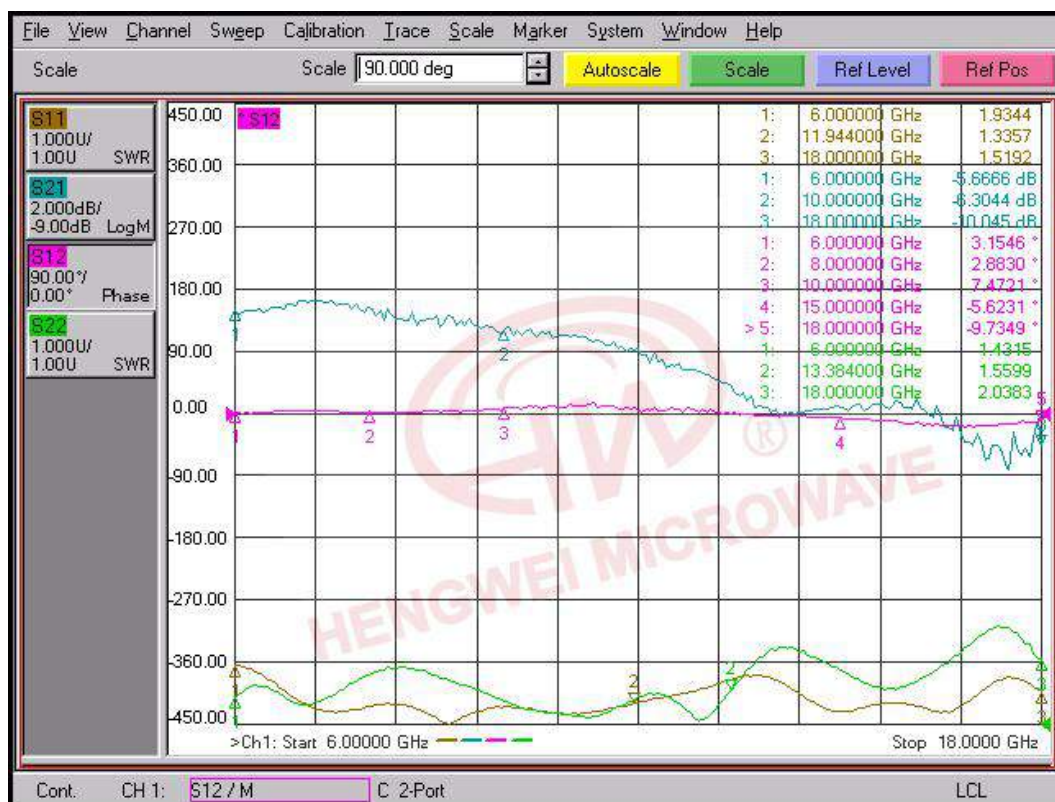

PIC8: 360° Test Curve