

Product Working frequency coverage 2-18GHz

High stability

Low insertion loss.

Cost-effective.



Guaranteed Specification

parameters	Min.	Typ.	Max.	Unit
Frequency	2		18	GHz
VSWR (IN/OUT)			2.0	
Linear		± 1.0		dB
Insertion Loss		1.1		dB
Equalizing value		5		dB



Notes:

1. Measured in a 50-ohm system with nominal LO drive and downconverter application only, unless otherwise specified.

Absolute Maximum Ratings

Operating Temperature: -55 to +85
 Storage Temperature: -63 to +98
 Connector : SMA-K,SMA-J

Outline Drawings

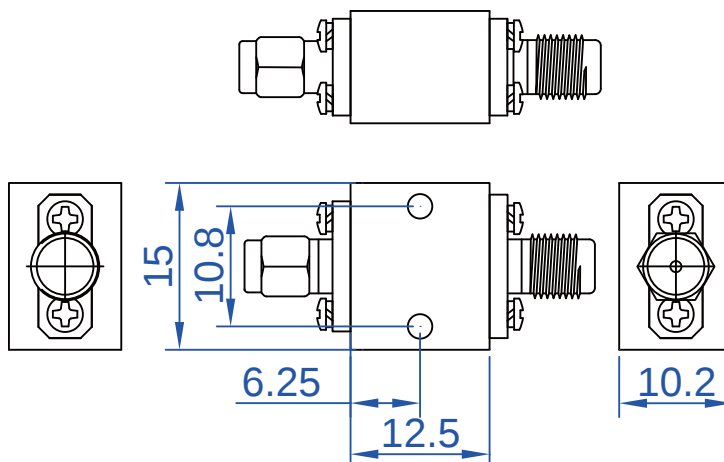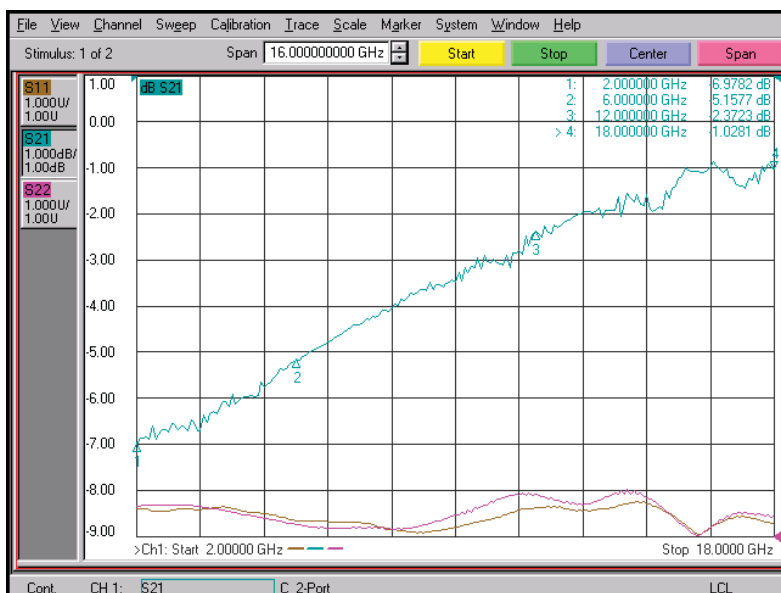

DIMENSIONS ARE IN MILLIMETERS