

Product Working frequency coverage 2-18GHz

High stability

Low insertion loss.

Cost-effective.



Guaranteed Specification

parameters	Min.	Typ.	Max.	Unit
Frequency	2		18	GHz
VSWR (IN/OUT)			2.0	
Linear		± 1.0		dB
Insertion Loss		1.1		dB
Equalizing value		6		dB

Notes: 1. Measured in a 50-ohm system with nominal LO drive and downconverter application only, unless otherwise specified.

Absolute Maximum Ratings

Operating Temperature: -55 to +85

Storage Temperature: -63 to +98

Connector : SMA-K, SMA-J




HENGWEI MICROWAVE

EQUALIZER

HWEQ20180-6

Outline Drawings

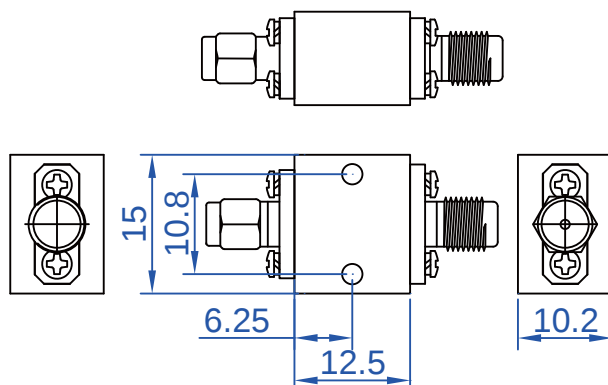

DIMENSIONS ARE IN MILLIMETERS