




HENGWEI MICROWAVE

HWSPDT020040R80

FEATURE:

- ◆ Solid State,Mixture Integrated
- ◆ High Speed,Low Loss,High Isolation
- ◆ Field Removable SMA(F) Connector
- ◆ Integrated with Driver

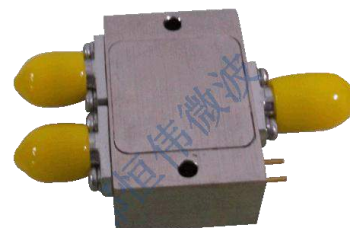

APPLICATION:

- ◆ Test equipment
- ◆ Radar Warfare system
- ◆ Communication system

SPECIFICATIONS

ITEM	Parameter
Fre.	2~4GHz
IL (dB.Typ)	1
Isolation(dB.Min)	85
VSWR(Max)	1.5
Input Power(W.Max)	0.5
Switch time(ns)	40
Current@ +5V/-5VDC(mA.Typ)	60/40
Conector	SMA-F

ENVIRONMENTAL RATINGS



Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+85	℃
Non-operating Temperature	-55		+125	℃
Relative humidity		95		%
Altitude	10000		30000	feet
Shock / Vibration(MIL-STD-810F)		Airborne		



HENGWEI MICROWAVE

HWSPDT020040R80


OUTLINE DRAWING(mm)

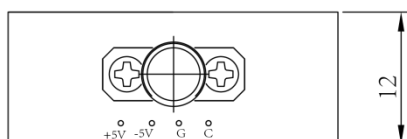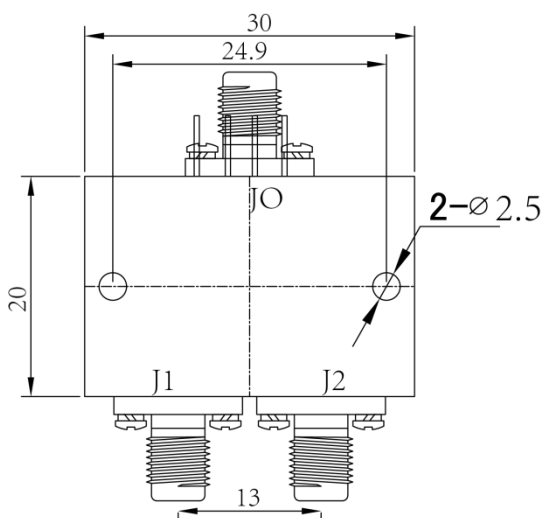

ON	C
J0-J1	1
J0-J2	0

注: “1” +5V, “0” 0V.

TEST CURVE:

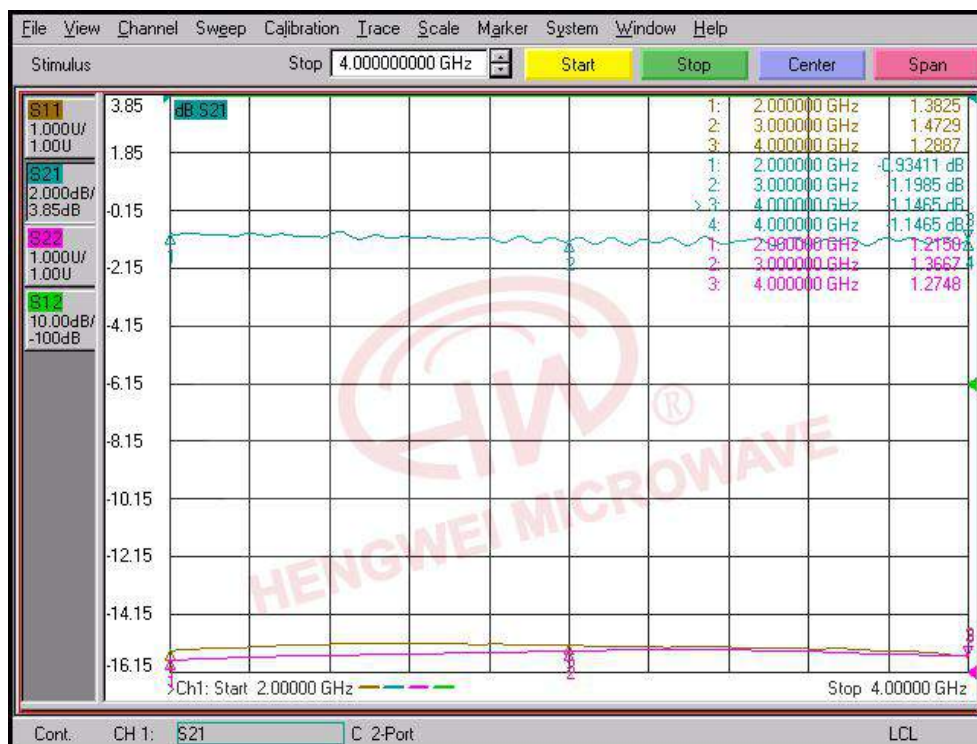


J0-1IL




HENGWEI MICROWAVE

HWSPDT020040R80

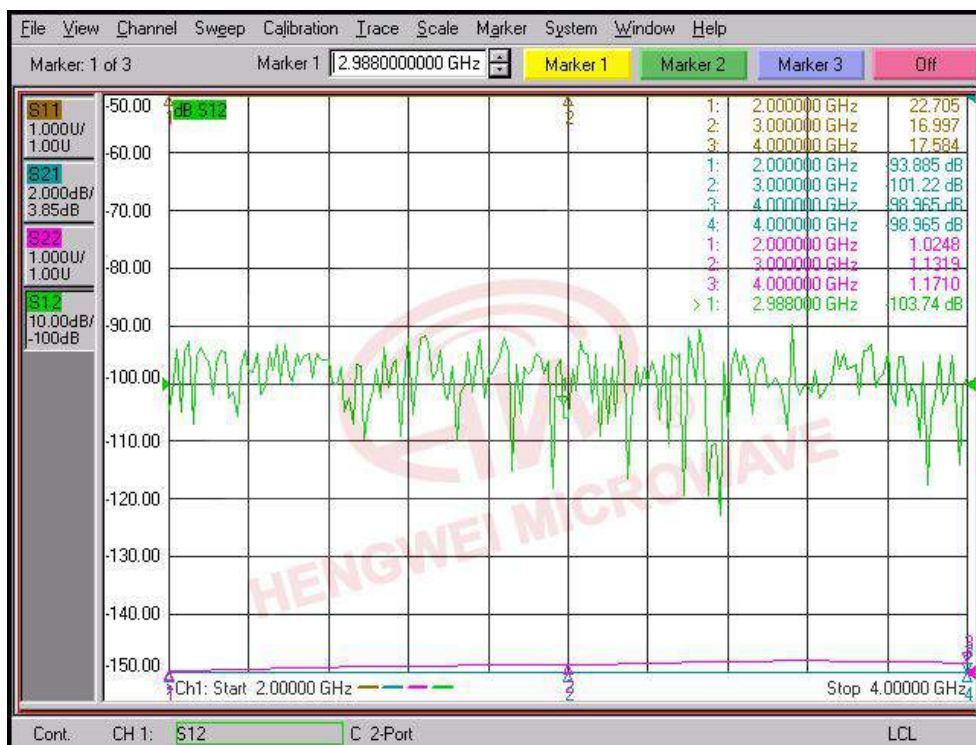

J0-1IS0

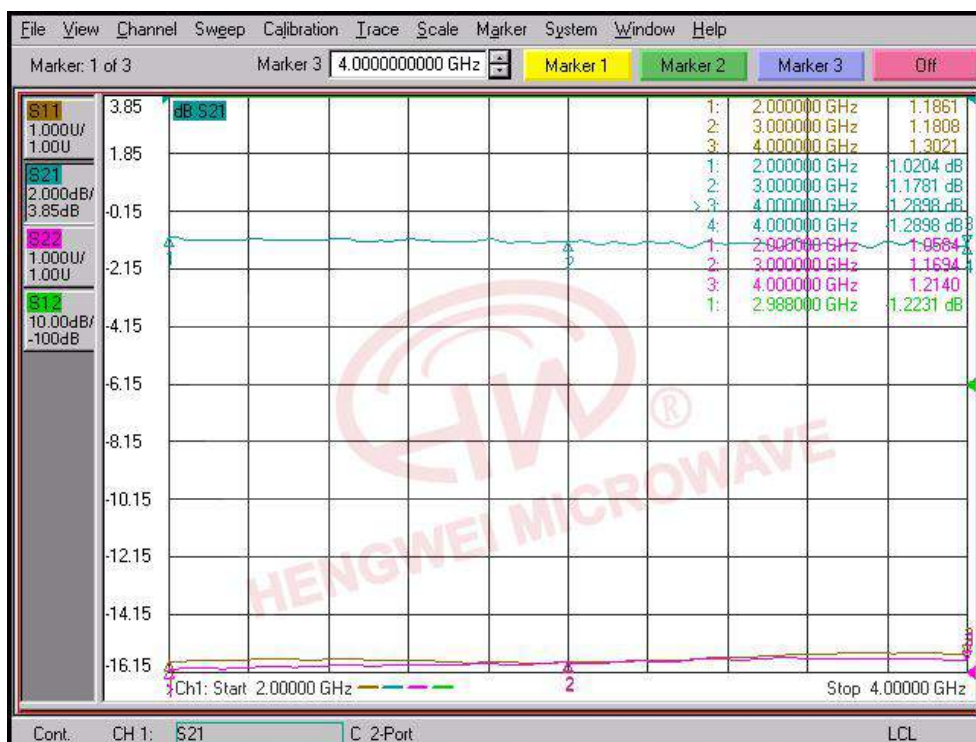


J0-2IL



HENGWEI MICROWAVE

HWSPDT020040R80

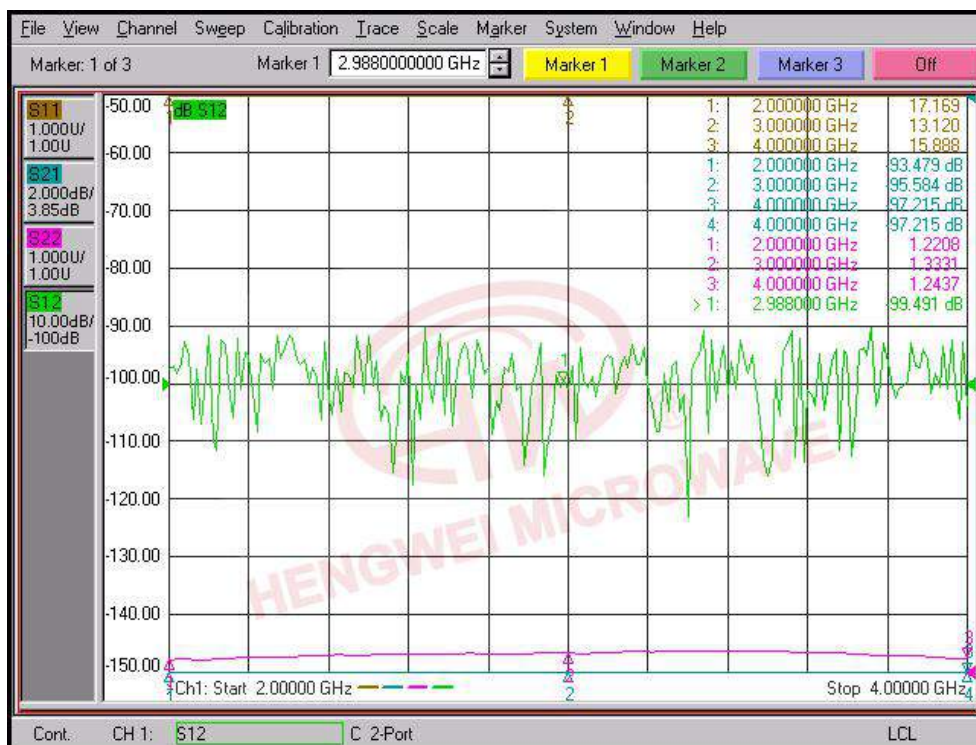

J0-2ISO